

Protech Road Paint

Thick film coating specific for the protection of asphalts and bitumens



Protech Road Paint is a thick paint based on acrylic resins in aqueous emulsion for the protection and waterproofing of bituminous floors in urban and pedestrian areas. Protech Road Paint is ideal for surfaces in car parks, yards, cycle paths and sidewalks, it also increases the resistance of the floor to wear, UV rays and chemical aggression.

CUSTOMS CODE: 3209 1000

COMPONENTS: Single-component

APPEARANCE: Thick liquid

AVAILABLE COLORS: Request available colors

PACKAGING AND DIMENSIONS: Can 25 kg

FEATURES AND BENEFITS

Protech Road Paint avoids the migration of bituminous binders and the accumulation of heat due to sunlight and allows to:

- Reduce the disintegration, breakage and swelling of the bituminous artefact.
- Protect the paving in bituminous conglomerate from sudden changes in temperature.
- Increase the durability of the work.
- Improve the aesthetics of the flooring and reduce the environmental impact being able to choose from various colours.
- Noticeably reduce bitumen odours.

FIELDS OF APPLICATION

Protech Road Paint is formulated for the finishing and protection of manufactured products in bituminous conglomerate in urban and pedestrian areas such as yards, avenues and preferential lanes, sidewalks and cycle paths, sports facilities.

ALLOWED SUPPORTS

Bitumen waterproofing membranes - Asphalt

PREPARATION OF SUPPORTS

Remove all traces of dust and traces of oils, greasy substances and incoherent parts. On a dry support, apply Protech Road Paint according to the methods described in the instructions for use.

MODE OF USE

Protech Road Paint can be diluted with water in a percentage not exceeding 30%. The application on a dry and clean surface is done manually with a roller for a minimum of 2 coats until saturation depending on the porosity of the support. We do not recommend the application with temperatures below +10°C.



APPLICATION METHODS

Brush - Paint roller - Spatula

TOOL CLEANING

Water

KEY FEATURES

- | | |
|---|--|
|  Density: 1.64 ± 0.1 kg/dm ³ |  Dosage: 2.0 kg/m ² |
|  Shelf-life: 12 months |  Temperature of use: +10 / +40 °C |
|  To be applied in two coats |  Use wearing protective glasses |
|  Use wearing protective gloves |  UV-resistant |

TECHNICAL SPECIFICATIONS

Dry residue **75 ± 0.5 %**

Time before second coat at 20°C **4 h**

Resistant to chemical agents

Brookfield
Viscosity **90.000 ± 2.000 mPas**

Touch hardening at 20°C **2 h**

CONSUMPTION

Approximately 2.0 kg/m² of Protech Road Paint in two coats.

STORAGE AND CONSERVATION


Protect from freezing. Store the product in its original packing, in a fresh and dry environment, avoiding frost and direct sunlight. Inadequate storage of the product may result in a loss of rheological performance. Store the product at a temperature between +5°C and +35°C.



Produced and distributed by **AZICHEM srl**
Via Giovanni Gentile, 16/A - 46044 Goito (MN), Italy
Tel: +39 0376.604185 / 604365
Fax: +39 0376 604398
www.azichem.com - info@azichem.com

Update of **02-04-2021**
Terms of sale and legal notices available at
<https://www.azichem.com/general-sales-conditions>
Total pages of this document: 3

PHOTO GALLERY

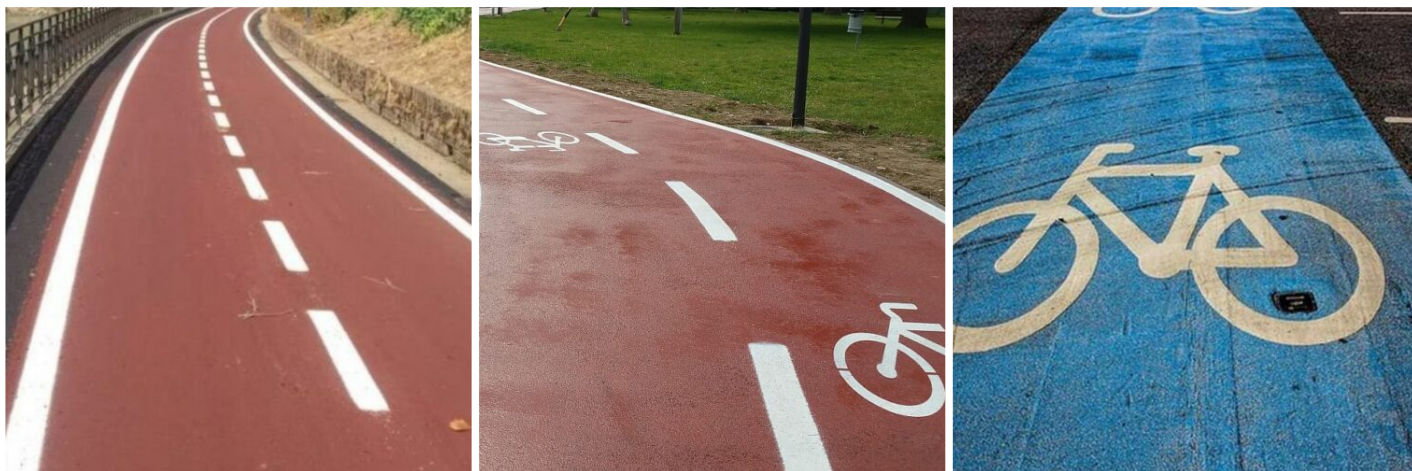

ADDITIONAL CONTENT



WARNINGS AND PRECAUTIONS

The general information, along with any instructions and recommendations for use of this product, including in this data sheet and eventually provided verbally or in writing, correspond to the present state of our scientific and practical knowledge. Any technical and performance data reported is the result of laboratory tests conducted in a controlled environment and thus may be subject to modification in relation to the actual conditions of implementation.

Azichem Srl does not assume any liability arising from inadequate characteristics related to improper use of the product or connected to defects arising from factors or elements unrelated to the quality of the product, including improper storage. Those wishing to utilise the product are required to determine prior to use whether or not the same is suitable for the intended use, assuming all consequent responsibility.

The technical and characteristic details contained in this data sheet shall be updated periodically. For consultation in real time, please visit the website: www.azichem.com. The date of revision is indicated in the space to the side. The current edition cancels out and replaces any previous version.

Please note that the user is required to read the latest Safety Data Sheet for this product, containing chemical-physical and toxicological data, risk phrases and other information regarding the safe transport, use and disposal of the product and its packaging. For consultation, please visit: www.azichem.com. It is forbidden to dispose of the product and/or packaging in the environment.

