

# Readymesh MM-150

## 15mm thin steel fibres



Fibres, obtained by the cutting of steel wire, with improved adhesion profile, for three-dimensional general structural reinforcement of cement-based conglomerates. The addition of Readymesh MM-150 significantly increases the mechanical performance of the structure in terms of toughness, ductility, fatigue, dynamic stress, shock, wear, tensile and shear strength and even post-cracking and damage behaviour. Readymesh MM-150 are particularly recommended for increasing ductility, toughness and thermal conductivity in concrete coatings for floor heating systems.

**CUSTOMS CODE:** 7326 2000

**COMPONENTS:** Single-component

**APPEARANCE:** Fibers

**AVAILABLE COLORS:** Steel

**PACKAGING AND DIMENSIONS:** Bag 20 kg - Pallet: 50 x (Bag 20 kg)

## FIELDS OF APPLICATION

General preparation of screeds, cements and fibre-reinforced concrete. Particularly recommended for compact prefabrications, thin concrete floorings and radiant floor heating systems.

## ALLOWED SUPPORTS

Concrete - Cement-based or lime-based mortars - Floor screed

## MODE OF USE

"Readymesh MM-150 fibres must be added to the concrete during mixing. It is recommended to pour the fibres directly onto the loading belt of the concrete mixer during the loading of the aggregates. Alternatively, it is possible to add them directly into the mixer after loading the concrete or into the onsite mixer. In this case, extend the mixing time by at least one minute (after a minimum of 3 minutes) for every m<sup>3</sup> of packaged concrete in order to achieve optimal distribution. If using a 200-litre onsite mixer, add the fibres immediately after loading part of the aggregates and before adding the remaining parts. The typical dosage of Readymesh MM-150 fibres varies from 15 to 30kg/m<sup>3</sup>. Conglomerates with Readymesh MM-150 can be easily transported and used with pumps, joiners, vibratory finishing machines, roadway extruders (e.g. slipform paver), etc. These fibres are typically used in conglomerates that have an aggregate diameter not exceeding 10-15mm."

## APPLICATION METHODS

To be added to other components



## KEY FEATURES

- ❑ Diameter: 0.75 mm
- ❑ Nonflammable
- ❑ Use wearing protective gloves
- ❑ Length: 15 mm
- ❑ Unlimited shelf-life

## TECHNICAL SPECIFICATIONS

Number of filmanets ~**50000 nr/kg**

Alkali-resistant material

Breaking load longitudinal >**1100 MPa**

Non-toxic material


## CONSUMPTION

Variable according to the type of work to be carried out and/or performance to be achieved.

## STORAGE AND CONSERVATION

Avoid contact between the product and acid substances. Protect from humidity.

## PHOTO GALLERY

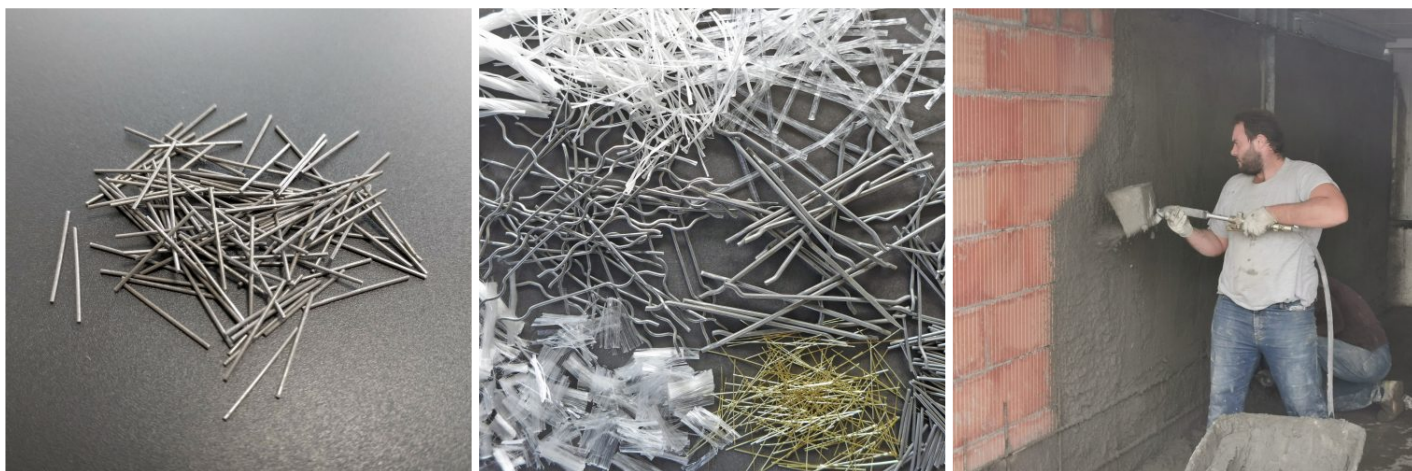

## ADDITIONAL CONTENT



Produced and distributed by **AZICHEM srl**  
Via Giovanni Gentile, 16/A - 46044 Goito (MN), Italy  
Tel: +39 0376.604185 / 604365  
Fax: +39 0376 604398  
[www.azichem.com](http://www.azichem.com) - [info@azichem.com](mailto:info@azichem.com)

Update of **30-10-2024**  
Terms of sale and legal notices available at  
<https://www.azichem.com/general-sales-conditions>  
**Total pages of this document: 3**

## WARNINGS AND PRECAUTIONS

The general information, along with any instructions and recommendations for use of this product, including in this data sheet and eventually provided verbally or in writing, correspond to the present state of our scientific and practical knowledge. Any technical and performance data reported is the result of laboratory tests conducted in a controlled environment and thus may be subject to modification in relation to the actual conditions of implementation.

Azichem Srl does not assume any liability arising from inadequate characteristics related to improper use of the product or connected to defects arising from factors or elements unrelated to the quality of the product, including improper storage. Those wishing to utilise the product are required to determine prior to use whether or not the same is suitable for the intended use, assuming all consequent responsibility.

The technical and characteristic details contained in this data sheet shall be updated periodically. For consultation in real time, please visit the website: [www.azichem.com](http://www.azichem.com). The date of revision is indicated in the space to the side. The current edition cancels out and replaces any previous version.

Please note that the user is required to read the latest Safety Data Sheet for this product, containing chemical-physical and toxicological data, risk phrases and other information regarding the safe transport, use and disposal of the product and its packaging. For consultation, please visit: [www.azichem.com](http://www.azichem.com).

It is forbidden to dispose of the product and/or packaging in the environment.

