

## Sanavel

Non-toxic paint, breathable, based on potassium silicate, to be used indoor



Breathable, natural, non-toxic, indoor paint, based on potassium silicate. Mineral-based, active formulation, high mildewcide and anti-condensation performance, prepared according to traditional recipes, for use in ecological building interventions, new buildings and in the restoration of vintage buildings and monuments.

**CUSTOMS CODE:** 3209 9000

**COMPONENTS:** Single-component

**APPEARANCE:** Liquid

**AVAILABLE COLORS:** Request available colors

**PACKAGING AND DIMENSIONS:** Pail 4 l - Pail 14 l

### FEATURES AND BENEFITS

Sanavel consists of potassium silicate, natural pigments. It has very high breathability, remarkable mildewcide and antibacterial properties. It has no solvents, thinners, harmful substances and toxic emissions in general, and does not have thermoplastic effects.

### FIELDS OF APPLICATION

Restoring and decorative paint for interior environments.

### ALLOWED SUPPORTS

Plasters - Concrete - Cement-based or lime-based mortars - Prefabricated concrete - Paint

### PREPARATION OF SUPPORTS

Application surfaces should be clean, free of soiling, crumbling and non-adhering parts, dust, etc. Pre-existing paints (washable, organic, solvent based etc. ) must be thoroughly removed. Preliminarily treat the support with the fixative Sanaxil Fix.

### MODE OF USE

Apply by brush, roller or spray. Sanavel is "dust-free" (it has started to be consistent to the touch) after about 1 hour. It can be overcoated after 4-5 hours, while it will be dry in-depth after 10-12 hours.



## APPLICATION METHODS

Brush - Paint roller - Sprayer

## TOOL CLEANING

Water

## KEY FEATURES

- ☒ Density: 1.61 kg/dm<sup>3</sup>
- ☒ Solvent-free
- ☒ To be applied in two coats
- ☒ Shelf-life: 12 months
- ☒ Temperature of use: +5 / +30 °C

## TECHNICAL SPECIFICATIONS

EN 13300 - categoria  
Wet abrasion resistance **3**

Dry residue **58 %**

UNI EN 1015-19  
Breathability **7.5 μ**


## CONSUMPTION

Apply from 0.30 to 0.40 liters of Sanavel per square metre of surface to be painted.

## STORAGE AND CONSERVATION

Protect from freezing. Store the product in its original packing, in a fresh and dry environment, avoiding frost and direct sunlight. Inadequate storage of the product may result in a loss of rheological performance.

## PHOTO GALLERY

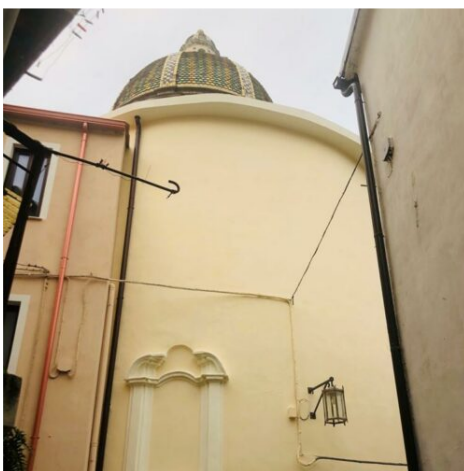

Produced and distributed by **AZICHEM srl**  
Via Giovanni Gentile, 16/A - 46044 Goito (MN), Italy  
Tel: +39 0376.604185 / 604365  
Fax: +39 0376 604398  
[www.azichem.com](http://www.azichem.com) - [info@azichem.com](mailto:info@azichem.com)

Update of **25-07-2022**  
Terms of sale and legal notices available at  
<https://www.azichem.com/general-sales-conditions>  
**Total pages of this document: 3**

## ADDITIONAL CONTENT



## WARNINGS AND PRECAUTIONS

Do not apply on surfaces in gypsum, on non-hardened surfaces, on wet or hot surfaces, with direct sunlight. Avoid prolonged direct exposure of the fresh surfaces to the wind and the sunshine.

During application, protect glass, enamelled metals, aluminium, polished tiles etc., which may be opacified by accidental contact with silicate solutions.

Colours may vary slightly depending on the temperature conditions at the time of laying and during the drying and dessication stages, the colour may be subject to slight variations. The general information, along with any instructions and recommendations for use of this product, including in this data sheet and eventually provided verbally or in writing, correspond to the present state of our scientific and practical knowledge.

Any technical and performance data reported is the result of laboratory tests conducted in a controlled environment and thus may be subject to modification in relation to the actual conditions of implementation.

Azichem Srl does not assume any liability arising from inadequate characteristics related to improper use of the product or connected to defects arising from factors or elements unrelated to the quality of the product, including improper storage.

Those wishing to utilise the product are required to determine prior to use whether or not the same is suitable for the intended use, assuming all consequent responsibility.

The technical and characteristic details contained in this data sheet shall be updated periodically. For consultation in real time, please visit the website: [www.azichem.com](http://www.azichem.com). The date of revision is indicated in the space to the side. The current edition cancels out and replaces any previous version.

Please note that the user is required to read the latest Safety Data Sheet for this product, containing chemical-physical and toxicological data, risk phrases and other information regarding the safe transport, use and disposal of the product and its packaging. For consultation, please visit: [www.azichem.com](http://www.azichem.com).

It is forbidden to dispose of the product and/or packaging in the environment.

