

Fluid Spritz

Inorganic liquid accelerant, for sprayed conglomerates (shotcrete)



Solution of mineral reactives (sodium silicate) to be used for the acceleration of setting of sprayed masonry and projected concretes, in the reinforcement of rocks outdoors and/or in a gallery, in laying self-sustaining and waterproofing claddings of tunnels, channels, vaults, basins, underground structures, etc., for use with specific equipment for hydrated mixtures (mixtures in which the silicate is sprayed on the shotcrete output nozzle).

CUSTOMS CODE: 3824 4000

COMPONENTS: Single-component

APPEARANCE: Liquid

AVAILABLE COLORS: White

PACKAGING AND DIMENSIONS: Tank 1350 kg - Plastic can 25 kg

FEATURES AND BENEFITS

Fluid Spritz is a wide diffusion accelerant characterised by ease of use, dosage variability according to the specific construction needs: reduction in the number of coating layers to be applied, reduction of patch layer laying time, reduction of rebound swarfs, option to operate even in cold weather.

FIELDS OF APPLICATION

Production of mortars and grouts sprayed with specific equipment (pumps for shotcrete machines) for hydrated mixtures in the reinforcement of rocks outdoors and/or in a gallery, in laying claddings, also with a load-bearing function, in galleries, on piles, sheet piles, diaphragms, channels, vaults, pondage, etc. In waterproofing underground structures. It can be used in structural sheets, for the safety of buildings affected by earthquakes.

ALLOWED SUPPORTS

Concrete - Bricks - Tuff - Mixed walls (bricks and stones) - Stone walls - Rock walls

MODE OF USE

Fluid Spritz must be previously introduced into a tank of suitable capacity to be added directly to the spray nozzle. It is always advisable to carry out preliminary tests to determine the most appropriate percentage product addition.


APPLICATION METHODS


To be added to other components - Shotcrete machine


TOOL CLEANING


Water

KEY FEATURES

 Density: 1.36 (± 0.02) kg/dm³

 Shelf-life: 12 months

 Nonflammable

 Solvent-free

TECHNICAL SPECIFICATIONS

10' a 150°C
Dry residue **42.5 \pm 1 %**

Viscosity **170 (± 70) mPa**

Boiling point/range **>100 °C**



CONSUMPTION

Use from 10 to 15% of Fluid Spritz on the weight of cement present in the mixture to be projected and based on the application conditions and type of concrete (range of use: between 35 and 70 kg per cubic metre).

STORAGE AND CONSERVATION

Protect from freezing. Store the product in its original packing, in a fresh and dry environment, avoiding frost and direct sunlight. Inadequate storage of the product may result in a loss of rheological performance. Store the product at a temperature between +5°C and +35°C.

PHOTO GALLERY

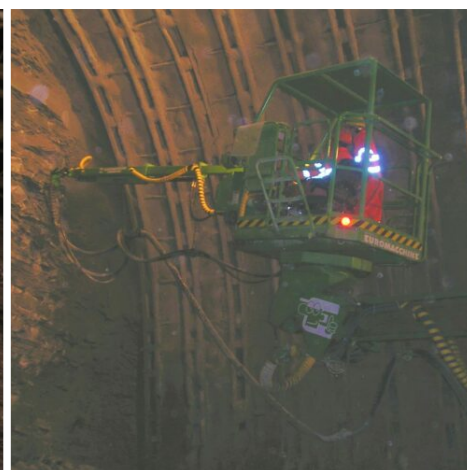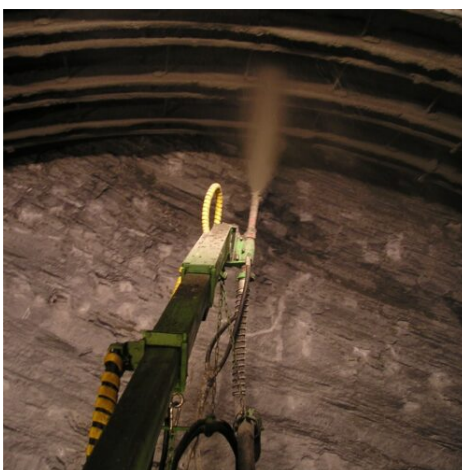

Produced and distributed by **AZICHEM srl**
Via Giovanni Gentile, 16/A - 46044 Goito (MN), Italy
Tel: +39 0376.604185 / 604365
Fax: +39 0376 604398
www.azichem.com - info@azichem.com

Update of **27-05-2021**
Terms of sale and legal notices available at
<https://www.azichem.com/general-sales-conditions>
Total pages of this document: 3

ADDITIONAL CONTENT



WARNINGS AND PRECAUTIONS

The acceleration depends not only on the dosing of Fluid Spritz but also on the strength of the cement and the granulometric composition of the mixtures, the mineralogical properties of media and of the aggregates, the environmental temperature and humidity conditions, and so on. The general information, along with any instructions and recommendations for use of this product, including in this data sheet and eventually provided verbally or in writing, correspond to the present state of our scientific and practical knowledge.

Any technical and performance data reported is the result of laboratory tests conducted in a controlled environment and thus may be subject to modification in relation to the actual conditions of implementation.

Azichem Srl does not assume any liability arising from inadequate characteristics related to improper use of the product or connected to defects arising from factors or elements unrelated to the quality of the product, including improper storage.

Those wishing to utilise the product are required to determine prior to use whether or not the same is suitable for the intended use, assuming all consequent responsibility.

The technical and characteristic details contained in this data sheet shall be updated periodically. For consultation in real time, please visit the website: www.azichem.com. The date of revision is indicated in the space to the side. The current edition cancels out and replaces any previous version.

Please note that the user is required to read the latest Safety Data Sheet for this product, containing chemical-physical and toxicological data, risk phrases and other information regarding the safe transport, use and disposal of the product and its packaging. For consultation, please visit: www.azichem.com.

It is forbidden to dispose of the product and/or packaging in the environment.

